


Compact Type Multicontact

When additional auxiliary contacts are required for DALI, emergency packs or other circuits the Compact multicontact version is ideal. Separate power supplies for the motor, main lamp and auxiliary contacts offer flexibility and dimming facility for loads up to 15kg.

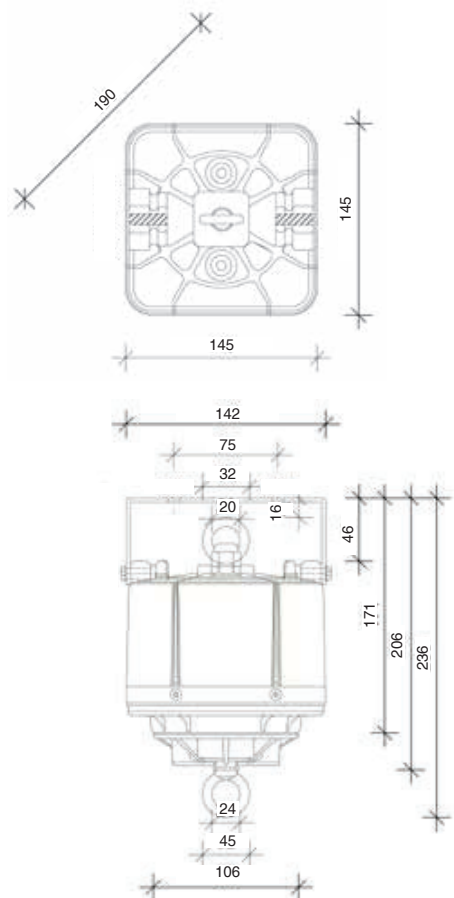

Dimensions:
CSI-12 M

Compact Type Multicontact	CSI-12 M	CDI-15 M
Lifting capacity	3-7 kg	3-15 kg
Lowering distance	15 m	10 m
Suspension cable	single	dual
Motor supply and lighting circuit	separate	separate
Power supply motor	100-277 V AC / 50-60Hz; 30W	
Lighting circuit	16A, 230V AC	16A, 230V AC
Auxiliary contacts / capacity	4/6A, 230V AC	4/6A, 230V AC
Protection category / class	IP 54/I	IP 54/I
Temperature range	-15 °C to + 60 °C	-15 °C to + 60 °C
Net weight / with packaging	3,5/3,9 kg	3,5/3,9 kg